

COUNTRY WOOD

PORCELAIN COLLECTION



 MADE IN USA

Product Featured: Elm Us

Our Country Wood Porcelain offers the look and feel of real wood with a beautiful honed finish. Applicable for floor or wall covering, this tile collection adds a modern edge to any room in your home.



Product Featured: Larch Us

FLOOR / WALL TILE




WIS11907 LARCH US Honed Bullnose 6"x24"



WIS11860 LARCH US Honed 6"x24"



WIS11829 LARCH US Honed 8"x48"

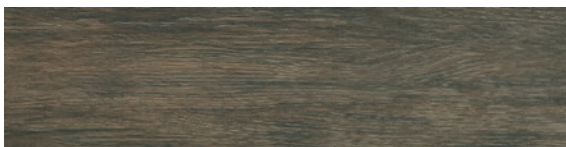

WIS11905 BEECH US Honed Bullnose 6"x24"



WIS11858 BEECH US Honed 6"x24"



WIS11827 BEECH US Honed 8"x48"



WIS11906 ELM US Honed Bullnose 6"x24"



WIS11859 ELM US Honed 6"x24"



WIS11828 ELM US Honed 8"x48"

COUNTRY WOOD

PORCELAIN COLLECTION



Product Featured: Larch Us

TECHNICAL INFORMATION

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		RESULTS COLORED BODY	
Water Absorption	ASTM C373	0.5% Maximum		≤ 0.1%	
Size			0.040		
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch)	± 0.50%	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 75% on any edge	≤ ± 0.50%	
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.75%	
	ASTM C485	• Warpage	± 0.50%	≤ ± 0.50%	
	ASTM C502	• Wedging	0.040	≤ ± 0.50%	
Rectified	ASTM C499	• Range of Thickness (inch)	± 0.25%	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.40% on any edge	≤ 0.25%	
	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%	
	ASTM C485	• Warpage	± 0.25%	≤ 0.40%	
	ASTM C502	• Wedging		≤ 0.25%	
Bond Strength	ASTM C482	50 psi or greater		> 200 psi	
Deep Abrasion	ASTM C1243	< 175 mm ³		< 150 mm ³	
Hardness (Mohs scale)		No requirement		≥ 7	
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred	
Chemical Resistance	ASTM C650	No requirement		Class A	
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf	
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection	

Acutest
DCOF
Wet ≥ 0.42

C1028
COF
Dry ≥ 0.80
Wet ≥ 0.60