

LINEA

PORCELAIN COLLECTION



 MADE IN USA

Product Featured: Universe Matte

Classic and traditional, Linea Collection is an elegant porcelain. With five neutral colors, three size options and sealed with a beautiful honed finish, this tile turns any room into a classic beauty. Applicable for wall or floor covering and durable for any high traffic environment.

FLOOR / WALL TILE



WIS11867
CLASSIC TAN Honed
12"x24"



WIS11872 CLASSIC TAN Honed 18"x36"



WIS11914
CLASSIC TAN Honed Bullnose
3"x24"



WIS11877 CLASSIC TAN Honed 6"x36"



WIS11868
TAUPE BLEND Honed
12"x24"




WIS11873 TAUPE BLEND Honed 18"x36"




WIS11915
TAUPE BLEND Honed Bullnose
3"x24"



WIS11878 TAUPE BLEND Honed 6"x36"

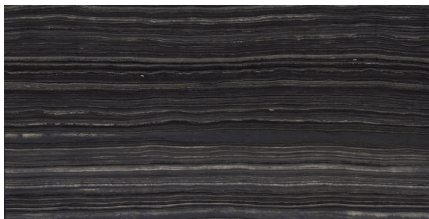


WIS11869
UNIVERSE Honed
12"x24"

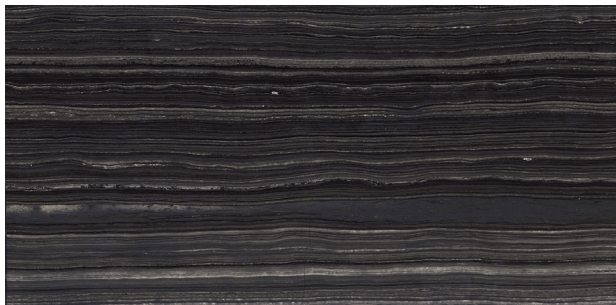

WIS11874 UNIVERSE Honed 18"x36"



WIS11916
UNIVERSE Honed Bullnose
3"x24"



WIS11879 UNIVERSE Honed 6"x36"

LINEA

PORCELAIN COLLECTION



Product Featured: Bright & Classic Tan Matte

FLOOR / WALL TILE



WIS11866
BRIGHT Honed
12"x24"



WIS11871 BRIGHT Honed 18"x36"



WIS11913
BRIGHT Honed Bullnose
3"x24"



WIS11876 BRIGHT Honed 6"x36"



WIS11865
AZUL Honed
12"x24"



WIS11870 AZUL Honed 18"x36"



WIS11912
AZUL Honed Bullnose
3"x24"



WIS11875 AZUL Honed 6"x36"



Product Featured: Taupe Blend

TECHNICAL INFORMATION

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		RESULTS COLORED BODY	
Water Absorption Size Calibrated (non rectified)	ASTM C373	0.5% Maximum		≤ 0.1%	
Rectified	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040	Acutest DCOF Wet ≥ 0.42
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%	
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%	
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%	
Bond Strength	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%	C1028 COF Dry ≥ 0.80 Wet ≥ 0.60
	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%	
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%	
Deep Abrasion	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%	C1028 COF Dry ≥ 0.80 Wet ≥ 0.60
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%	
	ASTM C482	50 psi or greater		> 200 psi	
	ASTM C1243	< 175 mm ³		< 150 mm ³	
Hardness (Mohs scale)		No requirement		≥ 7	C1028 COF Dry ≥ 0.80 Wet ≥ 0.60
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred	
Chemical Resistance	ASTM C650	No requirement		Class A	
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf	
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection	